


Technical Specifications:



Body:	M.S.
Cartridge	Imported S.S.
Size	Screwed 1/2" to 2" Flanged 1" to 4"
Efficiency	99.99%
Working Pressure	Upto 10 Kg/cm ²
Testing Pressure	24 bar
Ends	Screwed / Flanged (As Per 'D' Table) (Only Thickness as per Table F)
Service Life	Min.Exp. 8 to 10 Yrs.
Installation	Advisable at End Use Before FRL

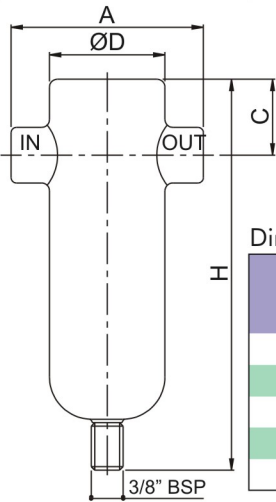

Dimensions : (Screwed)

(All Dimensions are in mm)

Model	Size	SCFM	A	H	C	ØD	Weight (Kg) Approx
HPVS2	1/2"	75	118	253	46	90	2.320
HPVS3	3/4"	80	120	275	56	90	3.220
HPVS4	1"	125	124	300	58	90	2.970
HPVS5	1.1/2"	280	150	438	95	115	7.130
HPVS6	2"	400	151	435	90	115	8.970

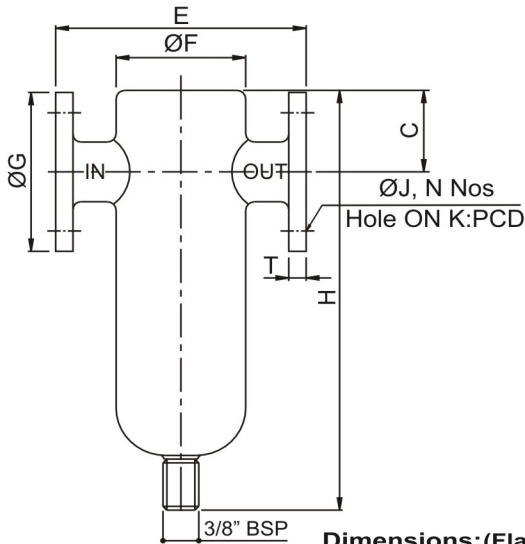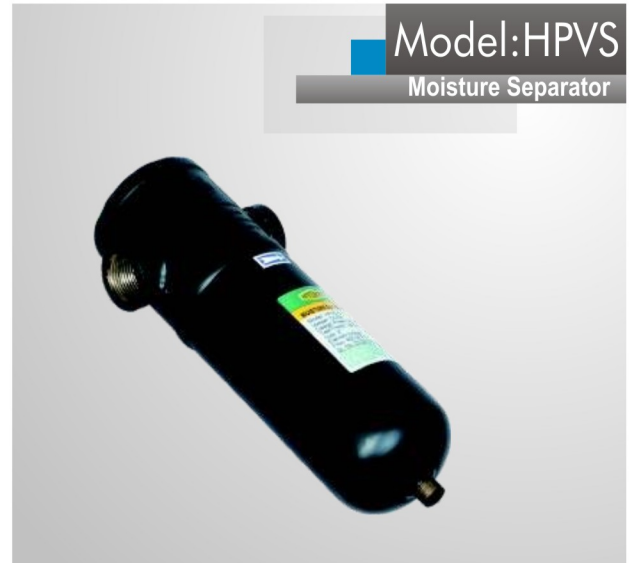

Dimensions:(Flanged As Per 'D' Table)(Only Thickness as per Table F) (All Dimensions are in mm)

Model	Size	SCFM	E	H	C	ØF	ØG	ØJ	N	K PCD	T	Weight (Kgs) Approx
HPVF4	1"	125	135	300	59	91	114	12.70	4	82.55	9.52	4.160
HPVF5	1.1/2"	280	185	420	87	115	133	12.70	4	98.42	12.7	9.340
HPVF6	2"	400	225	480	124	138	152	12.70	4	114.30	15.9	14.610
HPVF7	3"	900	288	580	126	230	184	15.90	4	146.05	15.9	26.700
HPVF8	4"	1500	345	685	149	250	216	15.90	4	177.8	15.9	41.000
HPVF	6"	ON REQUEST										
HPVF	8"											

